

Fulmetal Rediroll



Protect Fulmetal Rediroll Dry Vent is a universal ventilated dry fix system for plain angled or segmental ridge tiles. Available in both Terracotta and Grey, Fulmetal Rediroll is truly innovative in that its no union design promotes a completely uninterrupted air flow.

Rediroll, manufactured entirely from aluminium, stands above all other competitive systems. Exploiting the properties of aluminium gives Fulmetal Rediroll truly market leading performance. Because aluminium is 'rot proof' Rediroll has no need for cumbersome ridge unions to seal the gaps between the ridge tiles. These unions are often difficult to fit, add unnecessary time to any installation and fade over time through UV ageing. When considering a ventilated dry ridge system, Fulmetal Rediroll is a winner when it comes to ease of installation. Fulmetal Rediroll is also AA Fire Rated as it does not burn — which enables unrestricted use.

Fulmetal Rediroll

www.slate.uk.com





SPECIFICATION

Country of Origin:
United Kingdom

Colours:
Available in Terracotta or Grey.

Size:
6 metre length — ideal for most applications.

True 5,000mm²/m ventilation.

Pack: 6 lin mtr .

Performance:

All Aluminium construction.

Quick and easy to install — no ridge unions.


Universal — fits most ridges and hips.

Stainless steel clips provide mechanical fix even ridge tile spacing.

Screw Sleeve to prevent light bleed between ridges (if required).

Design life in excess of 30 years.

AA Fire rated.

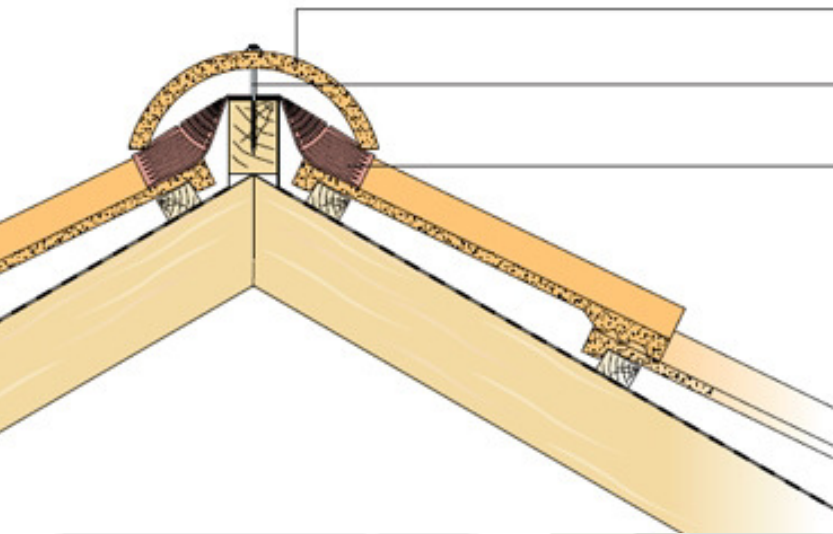

Ridge tile (not part of system).

Passivated heavy duty steel screw.

Fulmetal Rediroll.

Supply:

Extensive stocks are held at our distribution centres.

Nationwide and International delivery can be arranged for immediate despatch.

Unit 15 & 16, Airfield Approach Business Park
Flookburgh
Grange over Sands
Cumbria
LA11 7NG
England

Telephone: 015395 59289
Fax: 015395 58078
e-mail: Sales@slate.uk.com
Website: www.slate.uk.com

www.slate.uk.com